


Digital Printing Portfolio

Durst Tau 330 UV Inkjet

Fasson® product constructions shown have been evaluated by Avery Dennison and Durst and are recommended based upon the existing printer ink system utilized at the time of testing. Additional product constructions are available.

These products are available through our EXACT™ and Ready Width™ service programs. The one-slit roll minimum and next-day shipment are a great complement to the short run/quick turn capabilities of digital presses. Please contact your Avery Dennison sales representative for assistance.

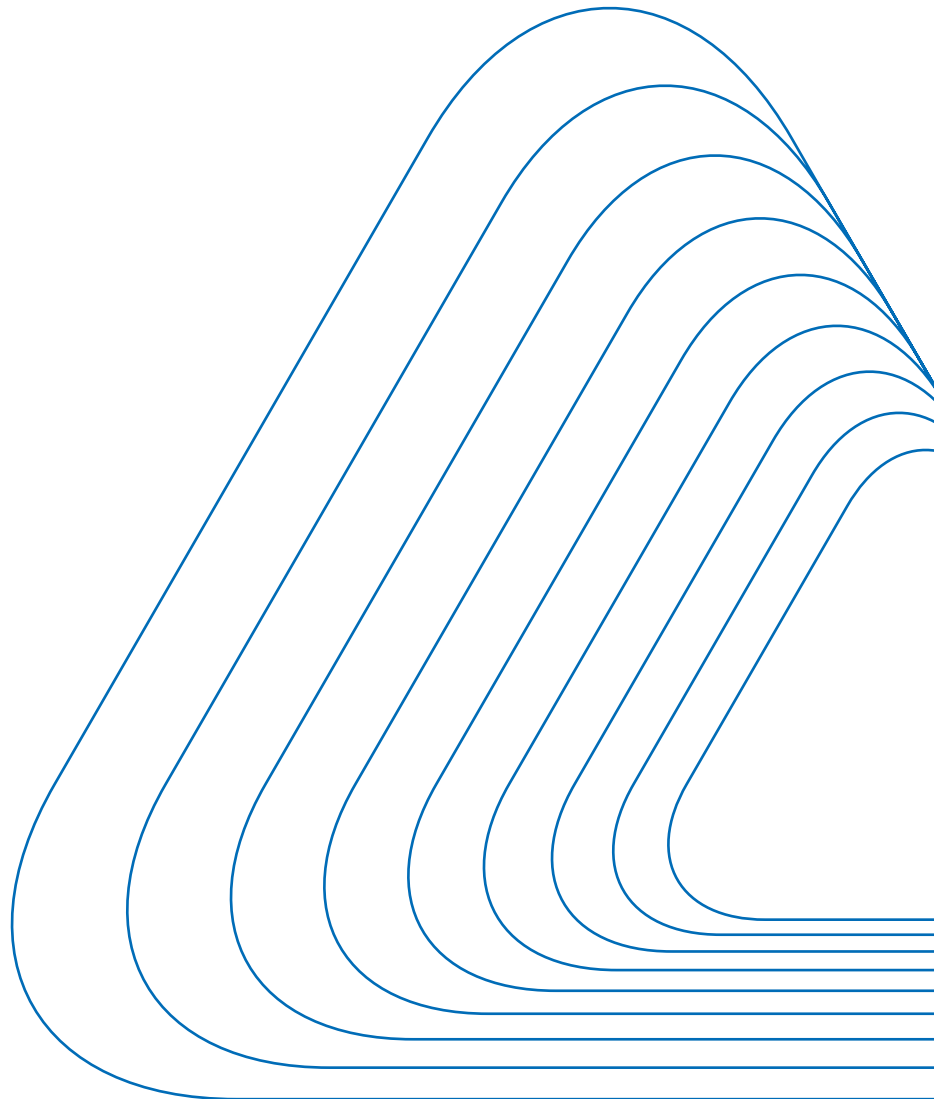

Spec #	Facestock	Adhesive	Liner	Width/Length (In/Ft.)	Tau 330
Prime Paper					
53664	55# Semi-Gloss UV Inkjet FSC®	AT20	40#SCK	EXACT™/5000	●
B4973	55# Semi-Gloss UV Inkjet FSC®	C4510	40#	Stock 78/1668	●
54384	Matte Litho FSC®	C4500	40#	EXACT™/5000	●
18444	Matte Litho FSC®	R5195	40#SCK	EXACT™/2500	●
03558	Matte Litho FSC®	S246	40#CK	EXACT™/5000	●
53352	MaxFlex™ Bright Silver	AT20	40#SCK	EXACT™/10000	●
53356	MaxFlex™ Bright Silver	C2075	40#SCK	EXACT™/10000	●
54394	MaxFlex™ Bright Silver	C4500	40#	EXACT™/5000, 10000	●
Prime Film					
79628	2 Mil Clear BOPP UV Inkjet	S7000	1.2 Mil PET	EXACT™/10000	●
79636	2 Mil Clear BOPP UV Inkjet	S7000	40#BG	EXACT™/10000	●
78889	2 Mil Metallized BOPP TC	S7000	1.2 MI PET	EXACT™/5000, 10000	●
79101	2 Mil Metallized BOPP TC	S7000	40#BG	EXACT™/10000	●
79723	2 Mil WH BOPP UV Inkjet	S7000	1.2 Mil PET	EXACT™/10000	●
79746	2 Mil White BOPP UV Inkjet	S7000	40#BG	EXACT™/10000	●
79634	2.3 Mil White BOPP UV Inkjet	S7000	1.2 Mil PET	EXACT™/10000	●
79635	2.3 Mil White BOPP UV Inkjet	S7000	40#BG	EXACT™/10000	●
76912	2.6 Mil White BOPP	S692N	40#BG	EXACT™/5000	●
78098	3 Mil White MDO	S692N	40#BG	EXACT™/5000, 10000	●

Spec #	Facestock	Adhesive	Liner	Width/Length (In/Ft.)	Tau 330
Wine Papers					
53381	56# MaxFlex™ Bright Silver	AT20	1.2 Mil PET	EXACT™/10000	●
53351	56# MaxFlex™ Bright Silver	S100R	44#PK	EXACT™/5000	●
19648	60# Classic Crest Solar White WS	AT20	1.2 Mil PET	EXACT™/5000, 10000	●
19657	60# Classic Crest Solar White WS FSC®	S100R	1.2 Mil PET	EXACT™/5000, 10000	●
12623	60# Classic Crest® Solar White WS FSC®	S100R	44#PK	EXACT™/5000	●

Spec #	Facestock	Adhesive	Liner	Width/Length (In/Ft.)	Tau 330	UL® 969	UL® 969 w/ Inks
Durables							
77923	2 Mil Bright Chrome PET TC	S8025	50#SCK	EXACT™/5000	●	I/O	I/O
77921	2 Mil Clear PET TC	S8025	50#SCK	EXACT™/5000	●	I/O	I/O
78387	2 Mil Matte Chrome PET TC	S8001	50#SCK	EXACT™/5000	●	I/O	I/O
77922	2 Mil Matte Chrome PET TC	S8025	50#SCK	EXACT™/5000	●	I/O	I/O
79534	2 Mil Matte Chrome PET TC	S8049	50#SCK	Custom 54/1000	●	I/O	I/O
78385	2 Mil White PET TC	S8001	50#SCK	EXACT™/5000	●	I/O	I/O w/ OL
77920	2 Mil White PET TC	S8025	50#SCK	EXACT™/5000	●	I/O	I/O w/ OL
79453	2 Mil White PET TC	S8049	50#SCK	EXACT™/2500	●	I/O	I/O w/ OL
78981	2 Mil White PET TCD	S8025	50#SCK	EXACT™/5000	●	I/O	I/O w/ OL
72828	2 Mil White Print Treated PET	S333	50#SCK	EXACT™/5000	●	I/O	I/O
78403	2.3 Mil White BOPP TC	S8001	50#SCK	EXACT™/5000	●	Indoors	Indoors
78401	3 Mil Synthetic Paper	S8001	50#SCK	EXACT™/5000, 10000	●	Indoors	Indoors
73952	4 Mil White Vinyl TC	S4600	50#SCK	EXACT™/3300	●	I/O	I/O
79648	4 Mil White Vinyl TCD	S8025	50#SCK	Stock 54/1668	●	I/O	I/O

Continued →

Spec #	Facestock	Adhesive	Liner	Width/Length (In/Ft.)	Tau 330	UL® 969	UL® 969 w/ Inks
Drum Label							
79572	3.7 Mil Smudgeproof Kimdura®	S4600	50#SCK	EXACT™/5000	●	-	Passed
72197	4 Mil TransCode®	S475	50#SCK	EXACT™/5000	TBD	Indoors	Passed



- Recommended: Substrate meets Avery Dennison proprietary print testing standards. To earn our recommendation, a specification must demonstrate good print quality, readability and durability. In addition, Durables specs must pass a modified version of cross hatch test ASTM D3359.
- Application Specific: May require further customer-specific testing in order to confirm appropriateness for an application.
- Not Recommended: Indicates one or more of the characteristics failed the graded characteristics within the Avery Dennison test standards.

UL® 969: UL recognized with thermal transfer ribbons. Refer to specification data sheet for specific conditions of acceptability and ribbons tested.

UL® 969 w/Inks: UL recognized with Durst Tau 330 inks. UL recognition with inks allows label adoption into an existing UL file. Refer to Avery Dennison UL-Recognized Components Guide for specific details regarding conditions of acceptability. The guide can be found at www.label.averydennison.com/durablegoods.

I/O: Indoors/Outdoors
 I/O w/ OL: Indoors/Outdoors with addition of overlamine,
 Spec.# 77844: 1 Mil Clear Print Treated PET/S8020/40#BG

See the EXACT Card for current EXACT and Ready Width service program.

NOTE: As label graphics and performance requirements vary, we encourage end application testing of all materials prior to use. This statement does not constitute a warranty.

label.averydennison.com

ADV# 430 05/2023

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison products are sold subject to Avery Dennison's general terms and conditions of sale found at label.averydennison.com/en/home/terms-and-conditions.html.



© 2023 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.