




BW7513

**Fasson®
Synthesis Paper 6 /
SR101/BG50#WH imp.**

**Fasson®
Synthesis Paper 6 A
matte white biaxially
oriented polypropylene
film.**

Applications



Key Features

- > The typical use is on wet tissue as a reclosable label
- > Letterpress, flexo, gravure and silk screen, giving good print results after corne

Facestock

A matte white biaxially oriented polypropylene film.

Basis Weight: 107 g/m² ± 10% ISO536

Caliper: 0.080 mm ± 10% ISO534

Adhesive

A special purpose removable, acrylic based solvent adhesive.

Liner

A super calendared white glassine paper with excellent roll label converting properties.

Basis Weight: 80 g/m² ± 10% ISO536

Caliper: 0.070mm ± 10% ISO534

Performance data

loop Tack (st,st)-FTM 9: 3.0

20 min 90° Peel (st,st)-FTM 2: 1.5

24 hour 90° Peel (st,st)-FTM 2: 2.0

Minimum Application Temperature: 5°C

After labeling 24H, Service Temperature Range: -20°C~+80°C

Adhesive Performance

SR101 is a removable solvent adhesive featuring excellent die cutting, strip performance and UV resistance on various substrates.

Applications and use

The typical use is on wet tissue as a reclosable label .

Due to semi-rigid nature of polypropylene care should be taken with non-uniform surfaces or squeezable applications.

On a few substrates (a.o. PVC, Polystyrene and ABS) the adhesion tends to become higher in course of time.

It is also suitable for thermal transfer printing.

The above does not represent any guarantee or warranty and the Purchaser must independently determine the suitability of the products for the Purchaser's purposes.

Conversion/printing

This product offers a specially coated surface, is specially suited to provide top printing quality in all usual processes, whether single or multicolour, line or process colour printing. And it is also non-impact printable. Acceptance of hot stamping foil is excellent.

Caution should be exercised when applying inks out to edge of the label, particularly UV screen inks and UV cured varnishes. High shrinkage coating can cause labels to lift off the liner or substrate.

Ink/ribbon testing is always recommended before production.



Sharp film tooling preferably in flat-bed, are important to ensure smooth conversion.

Need avoid too much re-winding tension to causing bleeding.

Shelf life

One year when stored at 23 ± 2°C at 50 ± 5% RH.

Fasson® Synthesis Paper 6 / SR101/BG50#WH imp.

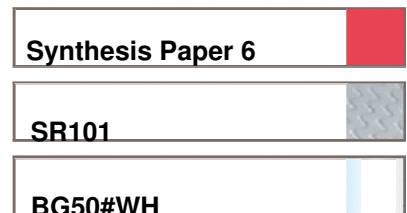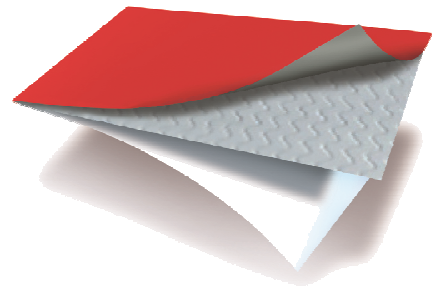

Asia Pacific

32/F., Skyline Tower
39 Wang Kwong Road
Kowloon Bay, Kowloon,
Hong Kong

Warrenty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

liable or responsible for consequential or incidental damages. NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERNATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.