

Facestock

A gloss white, corona treated BOPP NTC cavitated film.

Basis Weight:	39 g/m ²	ISO 536
Caliper:	56 µm	ISO 534

Adhesive

A general purpose permanent, acrylic-based adhesive designed for film facestocks. S692n meets the Association of Plastic Recyclers critical guidance protocol (APR HDPE-CG-01, Critical Guidance Protocol) for HDPE coloured or natural bottle recycling.

Liner

A supercalendered, glassine paper, specially designed for medium to high speed conversion. Designed for accurate kiss / die-cutting.

Basis Weight:	57 g/m ²	ISO	536
Caliper:	50 µm	ISO 534	

Laminate

Total Caliper	120 µm ±10%	Calculated
---------------	-------------	------------

Typical Performance Data

Initial Tack	10.0 N/25mm or tear	FTM 9 glass
Peel Adhes. 90°	8.0 N/25mm or tear	FTM 2 st. st.
Min. Appl. Temp.	5°C	
Service Temp.	-20°C to 80°C	

**Typical Performance Data only serves as reference to product performance under specified testing conditions and does not represent a product specification. Customers are recommended to test under actual conditions of use to determine its suitability.*

Applications and Use

Developed for cosmetics, personal care, beverages, luxury articles and promotional applications. Can be used in environmentally sensitive markets requiring recycling of 'polyolefin' packs.

Note: Due to the fairly rigid nature of the film care should be taken with use on non-uniform surfaces. Not suitable where a very high level of squeezability is desired.

Adhesive Performance

Designed for use with filmic facestocks. Good initial tack and adhesion on a variety of substrates including apolar surfaces. Exhibits good UV resistance and weatherability together with good adhesion performance.


Conversion/Printing

Printable using all conventional label printing technologies, conventional die-cutting processes and conventional inks and varnishes – consult your ink specialist for details. Over-laminating film helps improve scuff resistance. Cavitated films can sometimes exhibit poor scuff resistance in wet conditions, consult your ink specialist for details. Relevant tests should be conducted on cold foil printing to determine its suitability. Excessive press label rewind tension may cause labels to slip/misalign, or adhesive to bleed. When converting film products, anti-static devices are strongly recommended and all dies should be proofed to the construction.

Note: The information in this datasheet is correct at time of publishing. Avery Dennison reserves the right to revise the content as required without prior notice.

F79347.1525

PP60WH NTC S692N BG40WHN

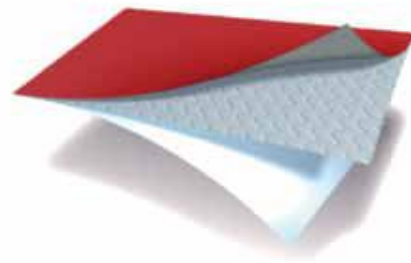

PP60WH NTC

S692N

BG40WHN

Food Industry Labels

The adhesive complies with FDA 175.105 and German recommendations XIV as published by BfR. This adhesive can be used indirect contact with dry and moist, non fatty foodstuffs.

Statement of Practical Use

As with all pressure sensitive materials, this product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

Shelf life

To obtain optimal performance, use this product within one year of delivery date, under storage conditions of 23 ± 2°C and 50 ± 5% RH. Prolonged storage outside of these conditions might reduce the shelf life.

Australia

4 Duigan Drive
Moorabbin
VIC 3189
Australia
Tel +61 3 9271 0300
Fax +61 3 9271 033

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages.

NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.