

Facestock

A homogeneously pigmented white PET with excellent tear strength, heat resistance, dimensional stability and chemical resistance. An even top coat ensured a smooth printing outcome by most of the conventional printing and Thermal Transfer barcode print with the right choice of ribbons.

Basis Weight	76 g/m ²	TAPPI T410
Caliper	50 µm	TAPPI T411

Adhesive

An ultra-removable adhesive specially designed for versatile performance property which is suitable to be used for electronic and clean-room applications.

Liner

An ultra low Silicone Extractable Polyester liner designed to withstand high speed die-cutting, stripping and dispensing processes. Suitable to be used in clean-room environment whereby low silicone/silicone free product is required.

Caliper	50 µm	TAPPI T411
---------	-------	------------

Typical Performance Data

Initial Tack	2.0 N/m	FTM 9 glass
Peel Adhes. 90°	1.0 N/m	FTM 2 st.st.
Min. appl. temp.	-5 °C	
Service temp.	-40°C to 120°C	Subject to facestock limitation

**Typical Performance Data only serves as reference to product performance under specified testing conditions and does not represent a product specification. Customers are recommended to test under actual conditions of use to determine its suitability.*

Applications and Use

A special designed ultra removable adhesive is suitable to be used in various applications such as WIP (Work In Progress) label, Product Identification, Energy Rating, and other temporary label application on durables goods. This product is also suitable to be used on electronics parts whereby outgassing has to be kept at minimum. Due to low silicone extractable property of liner, this product is suitable to be used in clean-room environment.

Conversion/printing


Fasson® 50mic White PET TC gives excellent printing performance in thermal transfer printing as well as conventional printing techniques. The facestock can be printed well with flexographic, letterpress and screen printing techniques. The facestock can also be printed with thermal transfer when matched with the correct ribbon. Therefore, careful selection of ribbon and preliminary testing is essential. In case solvent screen inks are used, please consult your ink manufacturer. Material shows excellent register stability on press and excellent flat bed conversion while rotary and magnetic dies need additional care. Square corners should be avoided.

ADS1490

Durables Restricted Use (Marketing Approval – ASEAN)

Fasson®

2mil WH PET TC/R146/2M LoEx PET

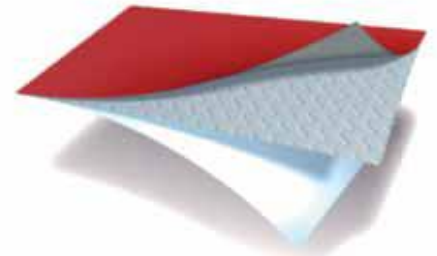

2mil WH PET TC

R146

2M LoEx PET

Statement of Practical Use

As with all pressure sensitive materials, this product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

Shelf life

One year when stored at 22 ± 2°C and 50 ± 5% RH.

Thailand

110/1 Moo 1 Tumbol
Srisajarakhe Yai
Amphur Bangsaothong
Samutprakarn
10540
Thailand

Malaysia

Lot 6, Jalan P/2 Kawasan
Perusahaan Bangi
43650
Bandar Baru Bangi,
Selangor DE
Malaysia

Indonesia

Cikarang Industrial
Estate
Block V-81 D, Jl.
Jabaneke
Bekasi 17550
Indonesia

Vietnam

Lot I-11, CN13 Road
Industrial Group 1
Tan Binh Industrial Park
Ward Son Ky
Tan Phu District
Ho Chi Minh City Vietnam

Singapore

151 Pasir Panjang Road
#03-13/16
Pasir Panjang Distripark
Singapore
118480

Philippines

Unit 2925
L29 Joy Nostalgc Center 17
ADB Avenue
Ortigas Center
Pasig Center 1600
Philippines

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages.

NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.