
AVERY DENNISON | Label and Packaging Materials

F50150.1000

Fasson®
DATA PE80 CD303 BG40WHN FSC



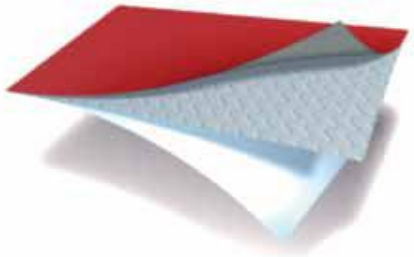

Facestock
A matte white, clay coated, cavitate, PE film.

Basis Weight	75 g/m²	ISO 536
Caliper	95 µm	ISO 534

Adhesive
A specialty high-performance permanent acrylic emulsion adhesive designed for chemical drum labelling and other demanding applications.

Liner
A supercalendered glassine paper specially designed for medium to high speed conversion. Designed for accurate kiss / die-cutting

Basis Weight	57 g/m²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	170 µm± 10%	Calculated

Typical Performance data

Initial Tack	8.0 N/25mm	FTM 9 glass
Peel Adhes. 90°	10.6 N/25mm	FTM 2 st.st.
Min. appl. temp.	5°C	
Service temp.	-30°C to 70°C subject to facestock limitations	

**Typical Performance Data only serves as reference to product performance under specified testing conditions and does not represent a product specification. Customers are recommended to test under actual conditions of use to determine its suitability.*

Adhesive Performance
Aggressive tack provided an extremely strong bond for demanding applications. Suitable for outdoor applications. Also suitable for adhering to rough surfaces such as HDPE chemical drums. Note: Tight rewind should be avoided to restrict bleed issues

Applications and use
Outdoor durability of up to six months can be expected in favourable conditions where the product is sheltered from direct sunlight, wind and rain. Typical application requiring resistance to environmental conditions, eg. chemical drums. Resistant to tearing and water. It has been tested and meets all requirements for BS5609: Section 2.
Note: Not suitable for applications above 70° C. Not suitable for laser printing.

Conversion/printing
Printable using all conventional label printing technologies, including foil stamping. Suitable for conventional die-cutting processes, consult your die-consultant for detail. Suitable for conventional inks and varnishes, consult your ink specialist for detail. The clay coated surface allows for high print definition.
Note: Friction cleaning (Web wipers) can cause dust. Films can sometimes exhibit poor scuff resistance in wet environments, consult your ink specialist for detail. Excessive press label rewind tension may cause labels to slip/misalign, or adhesive to bleed.* When converting filmic products, anti-static devices are strongly recommended and all dies should be proofed to the construction.

Food Industry Labels
The adhesive complies with FDA regulations (section 175.105) for indirect food contact.

Statement of Practical Use
As with all pressure sensitive materials, this product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

Shelf life
To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50% RH). Prolonged storage outside these conditions might reduce the shelf life.

Note: The information in this datasheet is correct at time of publishing. Avery Dennison reserves the right to revise the content as required without prior notice.

Warranty
All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages.

NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY ARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.