




LW3208

Fason® Uncoated Paper 60/S2045N/ BG40Y NI

A smooth white uncoated paper with excellent smudge resistance properties.

Applications

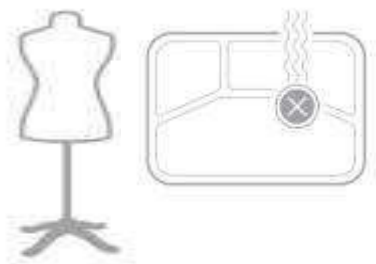

Salient Features

- **Low adhesive build up on press and applicators resulting in improved efficiency**
- **Optimum adhesion on wide range of substrates**
- **Consistent quality enabling high speed converting and printing efficiency**
- **Defined service guidelines**

Facestock

A smooth, bright white paper with excellent smudge resistance which is highly receptive to inks and markings.

Basis Weight	60 gsm $\pm$ 10%	ISO 536
Caliper	72 μ m $\pm$ 10%	ISO 534

Adhesive

A specially formulated permanent general purpose hotmelt adhesive, designed to meet specific demands of data processing industry.

Liner

A supercalendered glassine paper with excellent strength characteristics.,

Basis Weight	57 gsm $\pm$ 10%	ISO 536
Caliper	50 μ m $\pm$ 10%	ISO 534

Laminate

Total Caliper	135 μ m $\pm$ 10%
---------------	-----------------------

Typical Performance Data

Initial Tack	480 N/m	FTM 9 glass
Peel Adhes. 90°	320 N/m	FTM 2 st.st.
Min. appl. temp.	0°C	
Service temp.	-40°C to 70°C	

**Typical Performance Data only serves as reference to product performance under specified testing conditions and does not represent a product specification. Customers are recommended to test under actual conditions of use to determine its suitability.*

Applications and Use

The product is specially engineered to process through a wide range of impact printers. The product can be widely used in industrial and commercial label system, such as pharmaceutical, inventory, shipping labels or EDP labels. This product also exhibits good adhesion on garments.

Food Industry Label : The adhesive complies with FDA regulation section 175.105 for indirect food contact

Conversion/Printing


Fasson® Uncoated Paper product is printable by all conventional printing technologies in single and/or multi-colour, line or process printing by Thermal Transfer, Letterpress, Offset and Flexo.

Shelf life

To obtain optimal performance, use this product within two years from the date of shipment, under storage conditions as defined by FINAT (20- 25°C; 40-50%RH). Storage at higher temperatures and/or humidity levels for extended periods of time can reduce shelf life.

LW3208

Fasson® Uncoated Paper 60/S2045N/ BG40Y NI

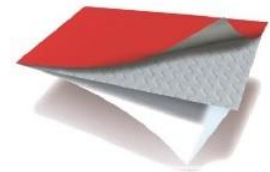

Uncoated Paper

S2045N

BG40Y NI

Avery Dennison India Pvt. Ltd.

Gurgaon :

Narsinghpur Industrial Area,
Delhi – Jaipur Highway,
District Gurgaon, Haryana.
India. 122001
Tel: +91 124 4351200

Pune :

G-5, MIDC Ranjangaon Industrial Area,
Taluka - Shirur ,
District – Pune, Maharashtra
India. 412220
Tel: +91 2138 664200

Bengaluru :

Plot No. 18 & 23, Peenya Industrial Area,
Phase-I, Yeshwanthpur Hobli,
District – Bengaluru, Karnataka
India. 560058
Tel: +91 80 43316888

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.