


## Digital Printing Portfolio

# Epson Water-based Inkjet

Fasson® product constructions shown have been evaluated by Avery Dennison on different water-based Inkjet platforms and are recommended based upon the existing printer ink system utilized at the time of testing. Additional product constructions are available.

These products are available through our EXACT™ and Ready Width™ service programs. The 1-slit roll minimum and next-day shipment are a great complement to the short run/quick turn capabilities of digital presses. Please contact your Avery Dennison sales representative for assistance.

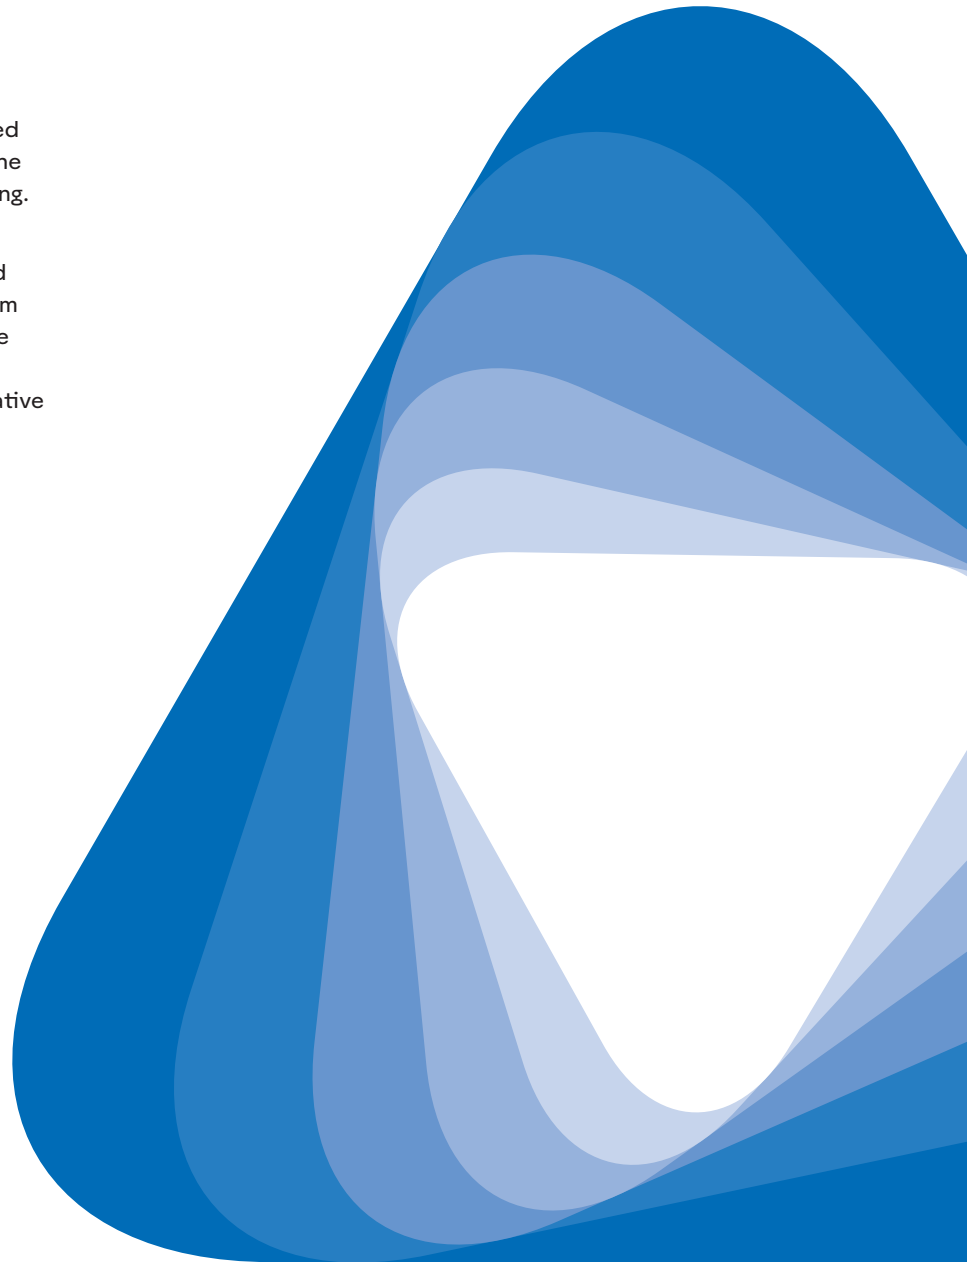

## Product Information

Spec#	Facestock	Adhesive	Liner	TMC 3400	TMC 3500	C831	C-7500	C-7500G	C6000/C6500
<b>Prime Paper</b>									
53109	DemandJet™ 500HG FSC®	AT20	40#SCK	●	●	●	●	●	●
53110	DemandJet™ 500HG FSC®	S2501	40#SCK	●	●	●	●	●	●
54401	DemandJet™ 500HG FSC®	C4500	40#SCK	●	●	●	●	●	●
53684	DemandJet™ 500HG FSC®	R195	40#SCK	●	●	●	●	●	●
53966	DemandJet™ 500HG FasCover™	S2501	40#SCK	●	●	●	●	●	●
B6890	DemandJet SG WBIJ	AT20	40#SCK	●	●	●	●	●	●
53708	Premium Matte Inkjet	S2501	41#LF	●	●	●	●	●	●
B6889	Premium Matte Inkjet	AT20	40#SCK	●	●	●	●	●	●
54058	Premium Matte Inkjet	S246	40#SCK	●	●	●	●	●	●
<b>Prime Film</b>									
B0589	Gloss White BOPP WBIJ	AT20	40#SCK	●	●	●	●	●	●
79659	Gloss White BOPP WBIJ	S7000	40#SCK	●	●	●	●	●	●
79739	Gloss White BOPP WBIJ	R195	40#SCK	●	●	●	●	●	●
79799	Matte White BOPP WBIJ	AT20	40#BG	●	●	●	●	●	●
79951	Gloss White BOPP WBIJ	C4500	40#SCK	●	●	●	●	●	●
<b>Durable Film</b>									
79348	5 Mil Matte White Drum Label	S4600	50#SCK	●*	●*	●*	●	●	●*
79404	3 Mil Matte White Synthetic	S8001	50#SCK	●	●	●	●	●	●
79119	2 Mil White Inkjet PET	S8001	50#SCK	●	●	●	●	●	●
79330	3.2 Mil White Inkjet Vinyl	S730	50#SCK	●	●	●	●	●	●
79673	5 Mil Matte Inkjet	S8001	50#SCK	●**	●	●	●**	●	●**
79724	3.5 Mil Matte White Synthetic WBIJ	S4600	50#SCK	●	●	●	●	●	●*

- Recommended: Indicates these substrates meet Avery Dennison proprietary print testing standards. To earn our recommendation, a specification must have average or better print quality, readability, image traits and durability.
- Indicates substrates meet Avery Dennison print testing standards but may require further customer-specific testing in order to confirm their appropriateness for an application.
- Not Recommended: Indicates one or more of the characteristics failed the graded characteristics within the Avery Dennison test standards.

NOTE: As label graphics and performance requirements vary, we encourage end use application testing of all materials prior to use.

\*Approved for BS 5609 Section 3 when printed with Epson Durabrite™ inks, Primerapigment inks, NeuraLabel pigment inks

\*\* Approved for UL® 969 Dry Indoor applications when printed using Epson Durabrite™ Inks

[label.averydennison.com](https://label.averydennison.com)

ADV# 426 05/2024

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison products are sold subject to Avery Dennison's general terms and conditions of sale found at [label.averydennison.com/en/home/terms-and-conditions.html](https://label.averydennison.com/en/home/terms-and-conditions.html).



© 2024 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.