

Facestock

Super-calendared, low-gloss white coated paper.

Basis Weight: 157 g/m² ± 10% ISO536

Caliper: 0.15 mm ± 10% ISO534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

A super calendared white glassine paper with excellent roll label converting properties

Basis Weight: 60 g/m² ± 10% ISO536

Caliper: 0.055mm ± 10% ISO534

Performance data

loop Tack (st,st)-FTM 9: 14 or Tear

20 min 90° Peel (st,st)-FTM 2: 7 or Tear

24 hour 90° Peel (st,st)-FTM 2: 8 or Tear

Minimum Application Temperature: 10°C

After labeling 24Hours, Service Temperature Range:-50°C~+90°C

Adhesive Performance

This is an adhesive with high initial viscosity and final viscosity, which has excellent performance on many packaging materials.

AP104B is suitable for applications where compliance with FDA 175.105 is required. This section covers applications where for indirect or incidental contact food, cosmetic or drug products.

Applications and use

The surface material has low luster and has a simple texture. The surface material itself does not have wet strength and waterproof function. Applicable for flat labeling. Small bottle labeling is not recommended.

The above does not represent any guarantee or warranty and the Purchaser must independently determine the suitability of the products for the Purchaser's purposes.

Conversion/printing

Low-gloss surface has certain ink acceptance performance, suitable for offset printing, flexo, letterpress and screen printing are not pushed. Recommend, customers are advised to make their own assessments.

Excellent paper processing performance, suitable for rotary and flat processing.

For fine bar code printing, a comprehensive print test evaluation is required.

Shelf life

One year when stored at 23 ± 2°C at 50 ± 5% RH.


AWS1031

Fasson®

157gsm Matt gloss

Paper/AP104B/BG40#W

hite imp

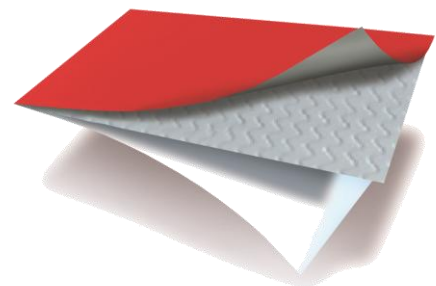

157gsm matt gloss paper

AP104B

BG40#White imp

Avery Dennison Label and Packaging Materials

32/F., Skyline Tower
39 Wang Kwong Road
Kowloon Bay, Kowloon,
Hong Kong
Tel: +852 2802-9618 | +856 400 828 3797

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way