AVERY DENNISON | Label and Packaging Materials

Inspired Brands. Intelligent World.™

ADS1463

Issue Date: Jul, 2018

Fasson® 25mic Gloss Black VOID PET TC/Transferable Permanent/BG50WH ni

FACESTOCK

The 25 micron gloss black polyester facestock incorporates a pattern release layer which leaves the word "VOID" on the substrate, showing evidence of tampering when removed. The surface is coated with an absorbent ink-receptive top coat featuring excellent tear strength, heat resistance, dimensional stability, opacity and chemical resistance.

• Caliper	25 µm (±10%)	ISO 534
• Basis Weight	36 g/m^2 (±10%)	ISO 536

ADHESIVE

A specially designed transferable permanent adhesive features medium initial tack, adhesion and shear. Offers a permanent bond to a wide variety of substrates including high (HSE), medium (MSE), low (LSE) surface energy and powder coat painted substrates.

LINER

A super-calendered white glassine paper with excellent roll label converting properties.

• Caliper	70 µm (±10%)	ISO 534
• Basis Weight	80 g/m^2 (±10%)	ISO 536

TYPICAL PERFORMANCE DATA (N/25mm)

• Loop Tack	7.0	FTM 9
• 24 hrs 90˚ Peel	5.0	FTM 2
• Min Application Temp	0˚C	
• Service Temp Range After 24hrs	-20˚ C – +90˚ C	

APPLICATION AND USE

This product is suitable to a wide variety of security labeling applications such as:

- Product authentication labels
- Nameplates and rating plates
- Property identification and asset tags
- Security labels for over the counter drugs and other packaging application
- Security tags


CONVERSION/PRINTING

This product can be printed by flexo, letterpress, and silk screen. Ink/ribbon testing is always recommended before production. This product can be die cut and stripped at high speeds on most web-fed presses. Harden treated and sharp dies is recommended.

STATEMENT OF PRACTICAL USE:

As with all pressure sensitive materials, this product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

Product Construction

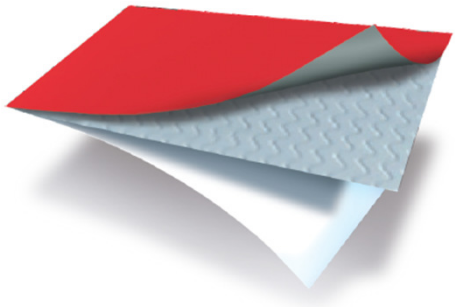

25mic Gloss Black VOID PET TC
Transferable Permanent
BG50#WH ni

RoHS/REGULATION 2002/95/EU

The substances listed EU RoHS 2 (Directive 2011/65/EU) are not intentionally used in this product. The concentration limits of these substances will not exceed the set maximum concentration limits as provided in EU RoHS 2 (Directive 2011/65/EU).

SHELF LIFE

Unless specified otherwise in this document, one year when stored at 23˚C ± 2˚C at 50 ± 5% RH

N.B. : All data to be considered as typical values.

Warranty
All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge or AVERY DENNISON may issue credit in such amount as it deems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages.
NO EXPRESS WARRANTIES AND NO IMPLIED WARRANTIES, WHETHER OF MERCHANTIBILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.
No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.